PROJECT PDF

Willemen Groep
Boerenkrijgstraat 133, BE - 2800 Mechelen
tel +32 15 569 965, groep@willemen.be

E411 Namur-Brussels - Eghezée-Thorembais-Saint-Trond

Project Details

Activities
Road construction
Concrete works

Contractors
Willemen Infra

location
E411
Belgium
Namur BE

Client
Service Public de Wallonie

Price
€3.141.000

Construction period
2 months

Start work
04-2015

End of work
06-2015

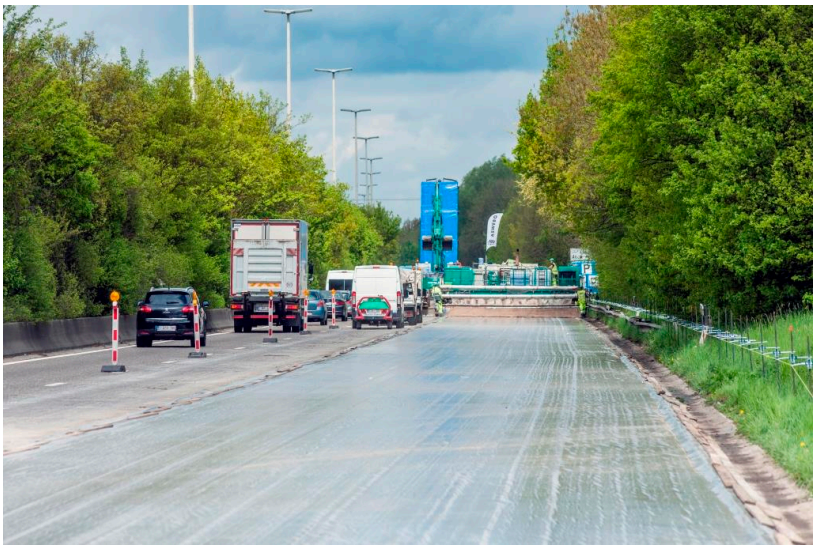

The work consisted of repairing the reinforced concrete road surface. This was done in two phases.

Phase one involved work in the hard shoulder, right hand lane and part of the middle lane. The hard shoulder was completely broken up. The road surface in continuous reinforced concrete and the foundations of the right and centre lanes were broken up.
The road surface was relaid in continuous reinforced concrete on top of the new foundation of lean concrete, with an asphalt intermediate layer between the foundation and the road surface.

During phase 2, repair work was undertaken on the continuous reinforced concrete and a bitumen top surface was applied to lanes 2 and 3.

Willemen Infra

Booiebos 4
9031 Drongen (Belgium)
tel + 32 9 282 60 30
infra@willemeninfra.be
website

Willemen Infra is a leading, Belgian road construction company with a regional presence in both Flanders and Wallonia. An important asset is that we have all aspects of the construction process under our own management and thus fully control the execution. Moreover, our team of 1,000 well-trained and experienced employees are willing to work at night and over the weekend to make sure they get everything done in time. In addition, thanks to our own COPRO and CSC-certified production and recycling sites, we are one of the leading producers for asphalt and road concrete.