PROJECT PDF

**Willemen Groep**
Boerenkrijgstraat 133, BE - 2800 Mechelen
tel +32 15 569 965, groep@willemen.be

# Bridge Vaartstraat / E313 - Ranst

## Project Details

**Activities**
Civil Engineering
Bridges

**Contractors**
Willemen Infra

**location**
Vaartstraat
2520 Ranst Belgium
Antwerpen BE

**Client**
Agentschap Wegen en Verkeer

**Construction period**
10 months

**Start work**
02-2024

**End of work**
12-2024

**Project website**
Vernieuwing brug Vaartstraat

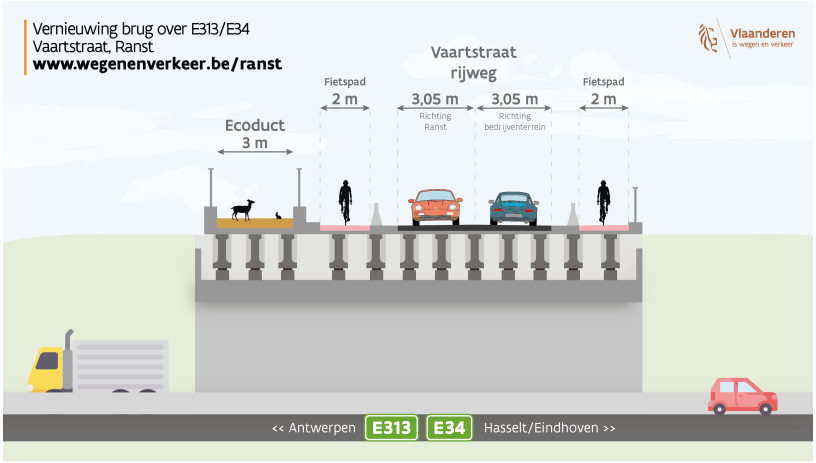


We are renovating the bridge on Vaartstraat over the E313/E34 in Ranst. It was badly damaged a few years ago when a lorry drove into its underside. Since then, for safety reasons, traffic on the old bridge has only been able to pass alternately via traffic lights. To increase traffic flow and guarantee road safety, we are building a completely new bridge. It will accommodate two-way motorised traffic and a one-way cycle path on both sides, separated from the carriageway. We are also building an ecoduct along the cycle path, separated by a screen. This will allow animals to cross in peace and safety and connect two nature reserves.

The existing bridge was completely demolished on the night of 9-10 March 2024. Watch the timelapse of the demolition.

### Willemen Infra

Booiebos 4
9031 Drongen (Belgium)
tel + 32 9 282 60 30
infra@willemeninfra.be
website

Willemen Infra is a leading, Belgian road construction company with a regional presence in both Flanders and Wallonia. An important asset is that we have all aspects of the construction process under our own management and thus fully control the execution. Moreover, our team of 1,000 well-trained and experienced employees are willing to work at night and over the weekend to make sure they get everything done in time. In addition, thanks to our own COPRO and CSC-certified production and recycling sites, we are one of the leading producers for asphalt and road concrete.